


**SINGLE CAPE COD RAIL GATE
(10 FOOT WIDE 46" HIGH GATE)
CENTRAL EYE HINGES
(Product Codes #8312) GATE
HUNG BETWEEN POSTS**

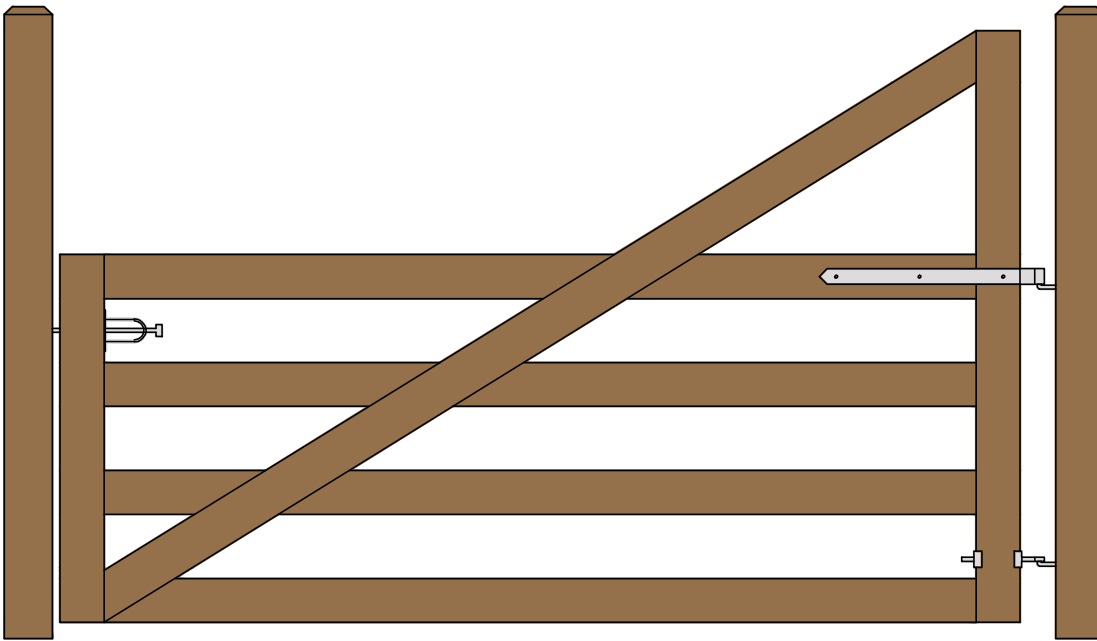


Distance between latch post and gate	A
Width of Gate	B
Distance between gate and hinge post	C
Total distance between posts	D

Hardware Required			
	Galvanized Finish	Black Powder Coat over Galvanized Finish	Central Eye Hinge Advantages
Hinge Set	8312-S242	8312-S24P	
fasteners included with hardware	Set Includes one 24 inch double strap (8312-542 or 8312-54SP) one adjustable bottom gate fitting (8250-002 or 8250-00P) two 12" adjustable gate pin (8800-122 or 8800-12P)		
Latch Options			Dimensions (feet and inches)
			A B C D
Irish Gate Latch (shown above)	8328-002	8328-00SP	1" 10' 4.5" 10' 5.5"
Spring Latch	8327-002	8327-00P	4" 10' 4.5" 10' 9.5"
Cane Bolt and Keep	5000-122 plus 5000-002	5000-12SP plus 5000-00SP	1" 10' 4.5" 10' 5.5"
Lumber Required			
Posts	2 of 10' x 6" x6" (usually dressed out at 5.5" x 5.5")		
Rails, Stiles (uprights) and Diagonals made from full 1" thick by 5.5" wide lumber (commonly stocked decking material or rough cut lumber)			
Rails	4 of 10' x 1" x 5.5"		
Stiles	3 of 8' x 1" x 5.5"		
Diagonals	2 of 12' x 1" x 5.5"		
Filler Blocks	2 of 12' x 1" x 5.5" (Parts E,F, and G on Plan Layout)		
Fasteners Required			
Approximately 50 of 1.75" x #8 wood screws (stainless preferred)			
18 of 3.5" x 3/8" carriage bolts (hot dipped galvanized or stainless steel), nuts, and washers			
Use a 24" Cane Bolt (5000-242 or 5000-24SP) if you require a means of keeping the gate open			




HingeandLatch.com

Download includes this materials list, component cutting and layout sheet, tips on installing gate posts, and detailed instructions.



FLAT FRONTAL VIEW

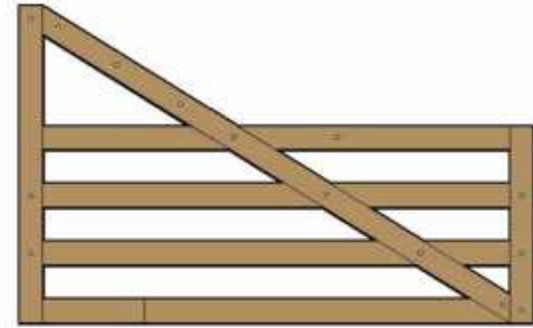



THREE LAYERS

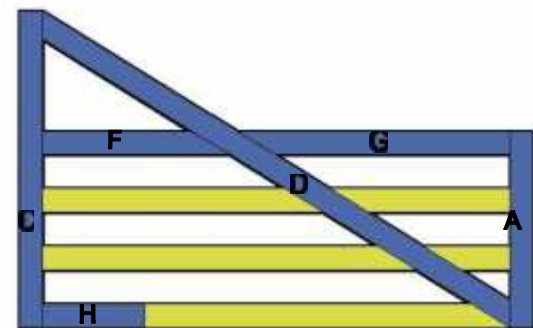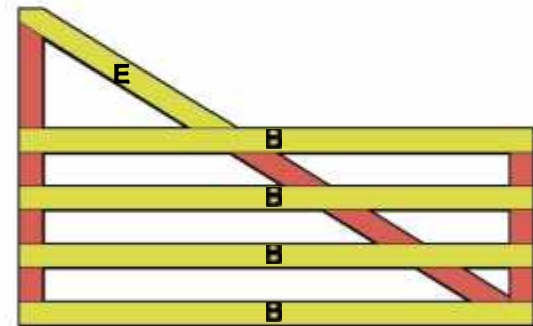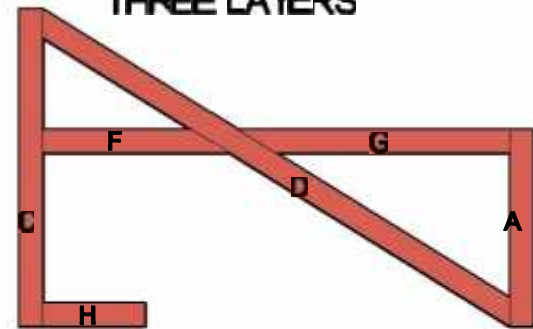

COMPONENTS (FULL 1" THICK x 5-1/2" WIDE)



32°

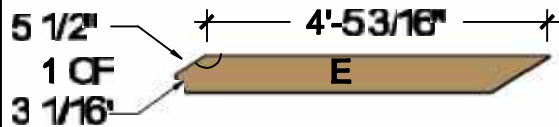

For Rear Eye Hinge Only