
## DOUBLE MAINE BOARD RAIL GATE (4 FOOT & 10 FOOT WIDE 46" HIGH GATES) CENTRAL EYE HINGES (Product Codes #8312) GATE HUNG BETWEEN POSTS



Distance between gate and hinge post	Α
Width of Left Gate	В
Distance between gates	С
Width of Right Gate	D
Distance between gate and hinge post	E
Total distance between posts	F

		Hardware Required						
	Galvanized Finish	Black Powder Coat over Galvanized Finish	C	Central Eye Hinge Advantages				itages
Hinge Sets	1 of 8312-S122 and 1 of 8312-S242	1 of 8312-S12P and 1 of 8312-S24P						
fasteners included	Two Sets Includes			Opens both ways 100 degrees				
with hardware	one 12" double strap (8312-422 or 8312-42SP) & 1 one 24" double stap (8312-542 or 8312-54SP)			Incredible amount of adjustment				
	two adjustable bottom gate fitting (825			Easy oper		opera	ration	
	four 12" adjustable gate pin (8800-122 or 8800-12P)			Very strong				
Cane Bolt (Vertical)	1 or 2 of 5000-242*	1 or 2 of 5000-24SP*						
Central Latch Options			Dimensions (feet and inches)					
		Α	В	С	D	Е	F	
Throw Over Gate Loop	4200-032	4200-03SP	4.5"	4'	1"	10'	4.5"	14' 10"
Cane Bolt and Keep	5000-122 plus 5000-002	5000-12SP plus 5000-00SP	4.5"	4'	1"	10'	4.5"	14' 10"
		Lumber Required						
Posts	2 of 8' x 6" x6" (usually dressed out at 5.5" x 5.5")							
Rails, Stiles		I 1" thick by 5.5" wide lumber (commonly stocked decking m	aterial o	rough	n cut I	umbei	^)	
Rails	3 of 8' x 1" x 5.5" and 6 of 10' x 1" x 5.5	5"						
Stiles	4 of 8' x 1" x 5.5"							
Diagonals	1 of 10' x 1" x 5.5" and 2 of 10' x 1" x 5							
		Fasteners Required						
	" x #8 wood screws (stainless preferred)							
	olts (hot dipped galvanized or stainless	,						
*One 24" Cane	Bolt (5000-242 or 5000-24SP) is requir	ed for central stability. Two are needed if you require a mea	ans of ke	eping	the ga	ates o	pen.	

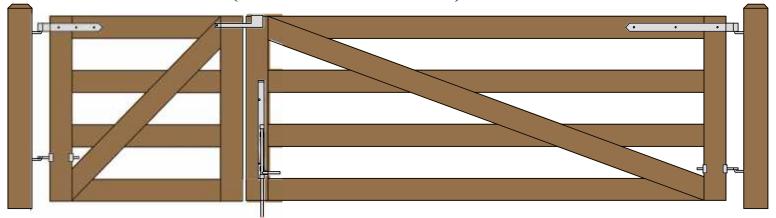