


SINGLE CAPE COD RAIL GATE (5 FOOT WIDE 46" HIGH GATE) CENTRAL EYE HINGES (Product Codes #8312) GATE HUNG BETWEEN POSTS

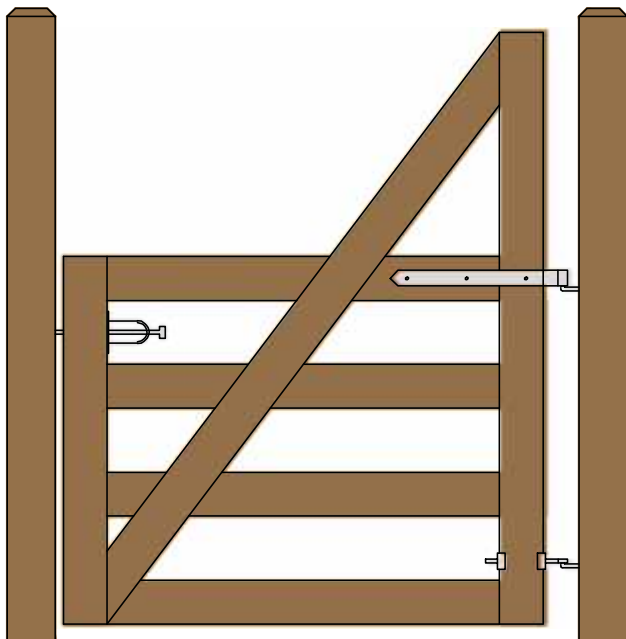

Distance between latch post and gate	A
Width of Gate	B
Distance between gate and hinge post	C
Total distance between posts	D

Hardware Required						
	Galvanized Finish	Black Powder Coat over Galvanized Finish	Central Eye Hinge Advantages			
Hinge Set	8312-S182	8312-S18P			Opens both ways 100 degrees Incredible amount of adjustment Easy operation Very strong	
fasteners included with hardware	Set Includes					
	one 18 inch double strap (8312-482 or 8312-48SP) one adjustable bottom gate fitting (8250-002 or 8250-00P) two 12" adjustable gate pin (8800-122 or 8800-12P)					
Latch Options			Dimensions (feet and inches)			
			A	B	C	D
Irish Gate Latch (shown above)	8328-002	8328-00SP	1"	5'	4.5"	5' 5.5"
Spring Latch	8327-002	8327-00P	4"	5'	4.5"	5' 9.5"
Cane Bolt and Keep	5000-122 plus 5000-002	5000-12SP plus 5000-00SP	1"	5'	4.5"	5' 5.5"
Lumber Required						
Posts	2 of 10' x 6" x 6" (usually dressed out at 5.5" x 5.5")					
Rails, Stiles (uprights) and Diagonals made from full 1" thick by 5.5" wide lumber (commonly stocked decking material or rough cut lumber)						
Rails	2 of 10' x 1" x 5.5"					
Stiles	3 of 8' x 1" x 5.5"					
Diagonals	2 of 8' x 1" x 5.5"					
Filler Blocks	1 of 12' x 1" x 5.5" (Parts E,F, and G on Plan Layout)					
Fasteners Required						
Approximately 50 of 1.75" x #8 wood screws (stainless preferred)						
14 of 3.5" x 3/8" carriage bolts (hot dipped galvanized or stainless steel), nuts, and washers						
Use a 24" Cane Bolt (5000-242 or 5000-24SP) if you require a means of keeping the gate open						




HingeandLatch.com

Download includes this materials list, component cutting and layout sheet, tips on installing gate posts, and detailed instructions.

FLAT FRONTAL VIEW



THREE LAYERS



COMPONENTS (FULL 1" THICK x 5-1/2" WIDE)

